



4 STAGE HEPA AIR SCRUBBER

Powerful Air Purification for Multiple Applications

The XPOWER X-3780 is a 5-speed commercial air purifier suitable for a variety of applications, including businesses, medical facilities, hospitals, waiting rooms, hotel lobbies, and other spaces where optimal indoor air quality is crucial. This scrubber quickly captures airborne contaminants, airborne particles, and other submicron sized impurities utilizing its advanced 4 stage filtration technology and powerful high torque motor. The X-3780 is equipped with an activated carbon filter that removes odors and captures submicron particulates with its HEPA Filter.



The first stage of filtration is a washable Nylon Mesh Filter (NFS16) that traps larger matter and prolongs the life of the subsequent filters. The second stage of filtration is a high capacity Pleated Media Filter (PF16) that traps smaller particulates and aides in preventing cross contamination. The third stage of filtration is a two pound Activated Carbon Filter (CF35) which neutralizes stubborn odors and absorbs harmful



XPOWER MANUFACTURE, INC
668 S. 6TH AVENUE, CITY OF INDUSTRY, CA, 91746
PHONE: (626) 285-3301 EMAIL: INFO@XPOWER.COM

WWW.XPOWER.COM

SPECIFICATIONS

VOCs (Volatile Organic Compounds). The final stage of filtration is a 2" thick HEPA Filter (HEPA50) that captures particulate matter as small as 0.3 microns with 99.97% Efficiency. An integrated indicator light illuminates when these filters need to be replaced.

- Aesthetically designed for hospitals, offices, businesses and other professional settings
- Powerful and energy efficient 1/2 HP external rotor induction motor
- Low 2.8 Amp draw with 600 CFM maximum airflow capacity
- 5-speed control switch for powerful high-speed to an extremely quiet low-speed
- 4-stage filtration system including activated carbon and HEPA filters
- Stackable, lightweight, and compact design constructed of durable ABS plastic
- Filter change indicator light
- 13 ft. power cord
- ETL/CETL safety certified

MODEL NO.	X-3780
VOLTS/HERTZ	115V / 60Hz
MOTOR	1/2 HP
MAX AMP	2.8 A
RATED AIRFLOW	600 CFM
SPEEDS	5 Speed
CORD LENGTH	13 Ft.
STACKABLE	Yes
UNIT WEIGHT	32.2 Lbs.
UNIT DIMENSIONS (LXWXH)	18.5 x 12.3 x 21.6 in.
HOUSING	ABS
DUCT SIZE (AIR OUTLET DIMENSIONS)	5 x 10.8 in.
DUAL THERMAL PROTECTION	Yes
PALLET QUANTITY	18

4 STAGE FILTRATION SYSTEM



NFS16
WASHABLE NYLON
MESH FILTER



CF35
ACTIVE CARBON
FILTER



PF16
PLEATED MEDIA
FILTER




HEPA50
HEPA FILTER

FILTER CHANGE LIGHT

Indicates when filter needs to be cleaned or changed.

FEATURES

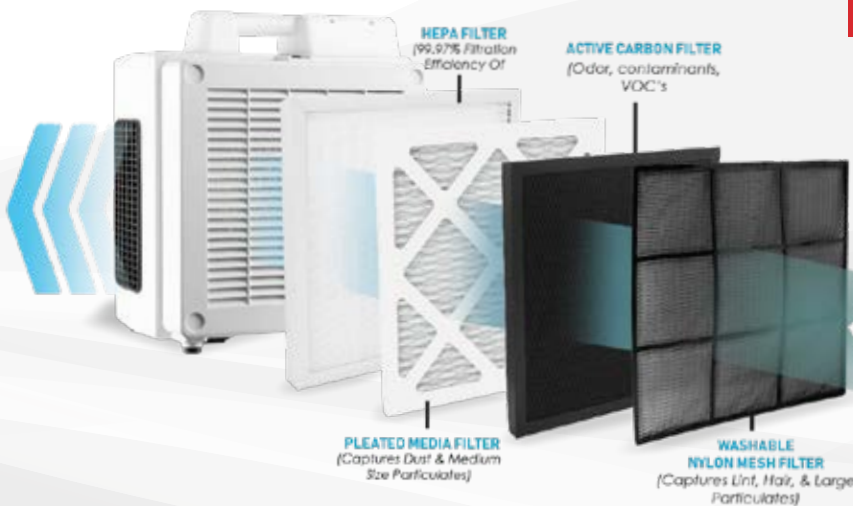

Stackable



5 Speed
Control Panel



WATER DAMAGE



FIRE & SMOKE DAMAGE



MOLD REMOVAL



RESTAURANT

